

6. Connect BikeTrax GPS tracker and additional battery

The BikeTrax GPS tracker is connected to the additional battery and coupled with the connection cable.


6.



7.

7. Mount BikeTrax GPS tracker

All cables including BikeTrax are mounted using the pre-positioned cable tie (or double-sided adhesive tape) to save as much space as possible. The battery can be placed anywhere nearby (also using adhesive tape).

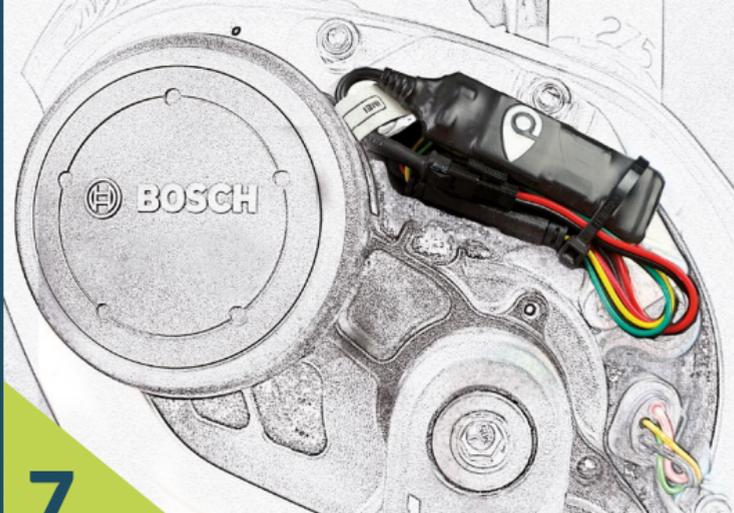

- The PowUnity logo on your BikeTrax GPS tracker should face outward, as shown in the picture.
- Make sure you have good cable management to avoid bent cables when installing the cable cover.
- Tighten the cable tie firmly and shorten it when you found the optimal position.

! The **initial operation** of your BikeTrax GPS tracker **should be performed outdoors**. This will ensure a fast connection with good network coverage.

! **Metallic objects** and coatings can **degrade the reception of GPS, GPRS and GSM signals**. Therefore, it is important that the BikeTrax GPS tracker is not hidden inside the e-bike frame or mounted with the GPS antenna (PowUnity logo) facing inwards. This can affect performance.

8. Reattach cable cover

Make sure that the mounted parts are under no stress. The cover should fit snugly onto the threaded holes of the frame and be screwed tightly.

8.



GOOD RIDE

e-mail: info@powunity.com
powunity.com

BIKE TRAX GPS anti-theft protection for E-Bikes

ASSEMBLY INSTRUCTION

for **BOSCH** e-bike systems*

DISPLAY CONNECTION




15 min.



 powunity

POWUNITY.COM

PACKAGE CONTENTS

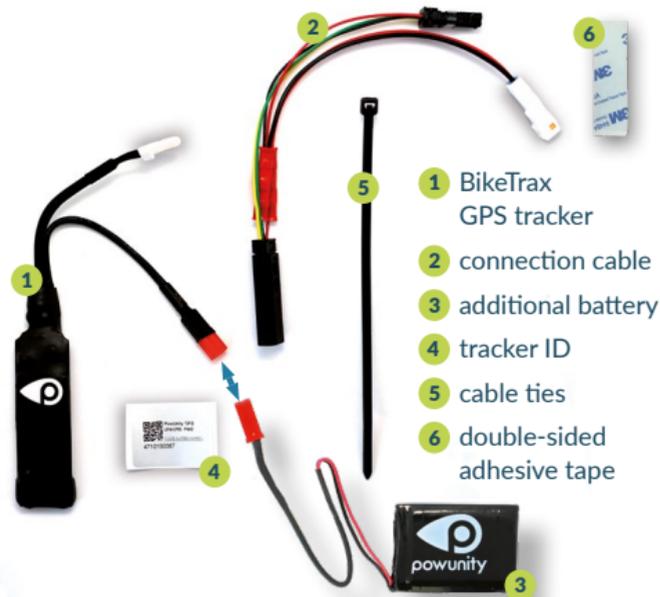


Every e-bike model is different, and especially the cable covers are available in a variety of different designs. **Therefore we ask for your understanding if the illustrations in this assembly instruction and the motor of your e-bike don't correspond.**



1. Remove cable cover


In some e-bike models the cover can only be removed after the pedal crank has been disassembled with a crank puller*. Further instructions can be found on the Internet.

* Available at PowUnity!

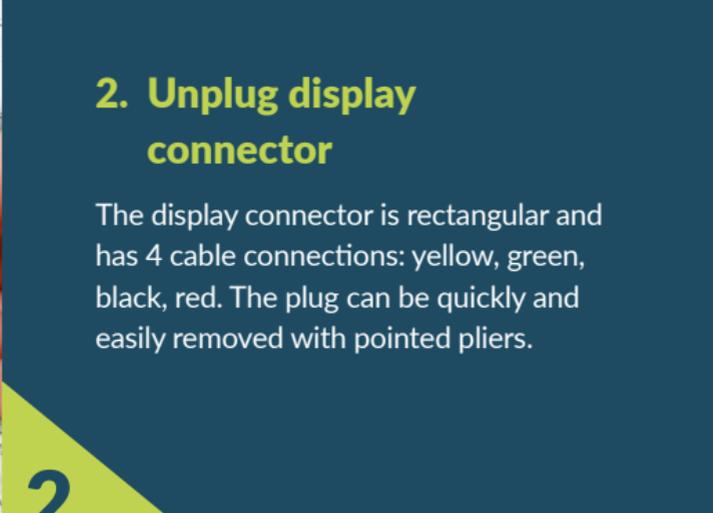


2. Unplug display connector

The display connector is rectangular and has 4 cable connections: yellow, green, black, red. The plug can be quickly and easily removed with pointed pliers.

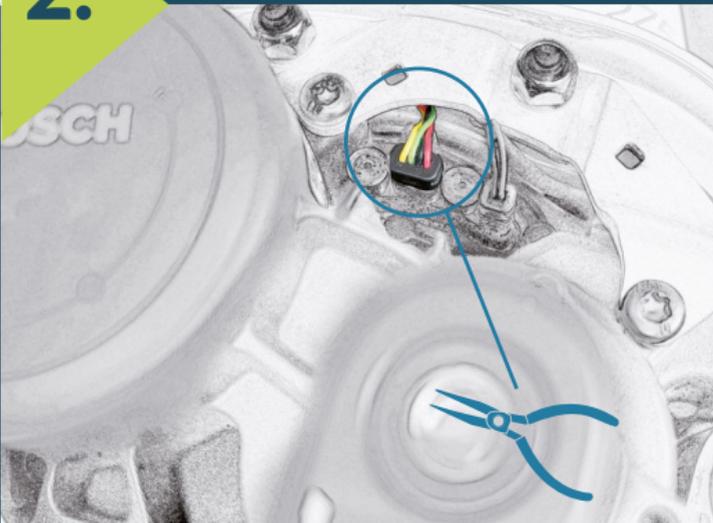


3. Couple display connector with BikeTrax connection cable

Take care of the correct plug-in direction! Ideally, the connector should be coupled once and not be removed again.

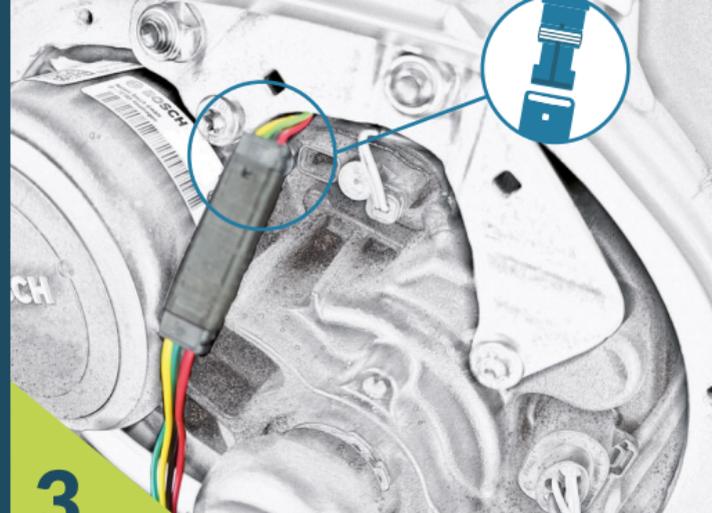


4. Select mounting point and position cable tie or adhesive tape

Depending on your e-bike model, different mounting points are possible for your BikeTrax. Position the cable tie or double-sided adhesive tape in the appropriate place, e.g. ...

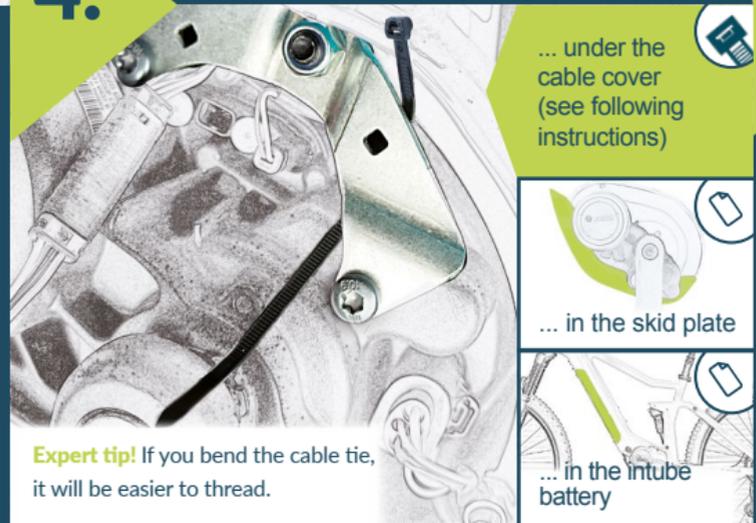

Expert tip! If you bend the cable tie, it will be easier to thread.

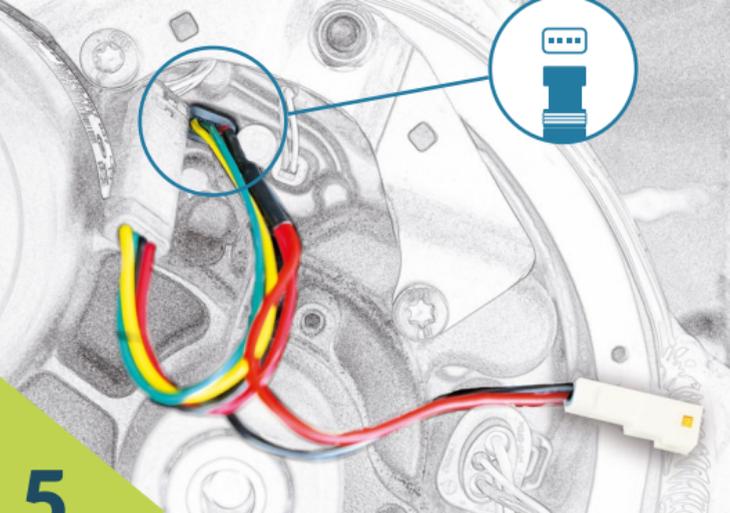

5. Plug in connection cable

Again, take care of the correct plug-in direction.