


## SpeedBox 3.2 for Yamaha



### STEP 1: Preparation for installaion

- A.** Prepare the following tools:
1. Hex Key H3
  2. Hex Key H6
  3. precision slotted screwdriver
- B.** Turn off the e-bike.
- C.** Remove the battery from the e-bike according to the manufacturer's manual.

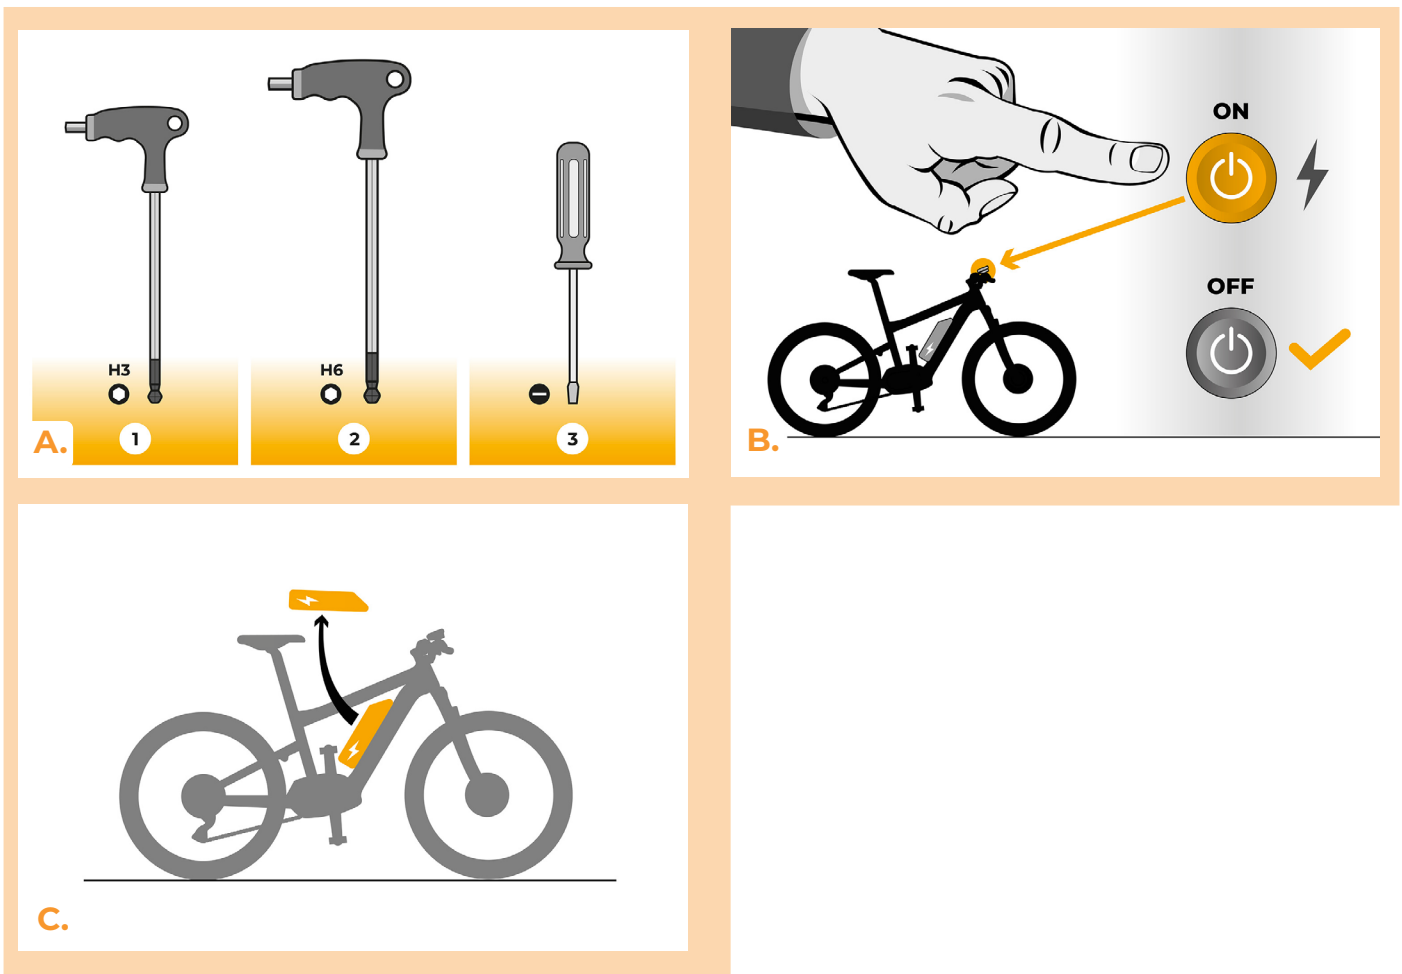



## STEP 2: Crank removal

- A.** Unscrew the four screws holding the motor cover with the Hex Key H3.
- B.** Remove the motor cover.

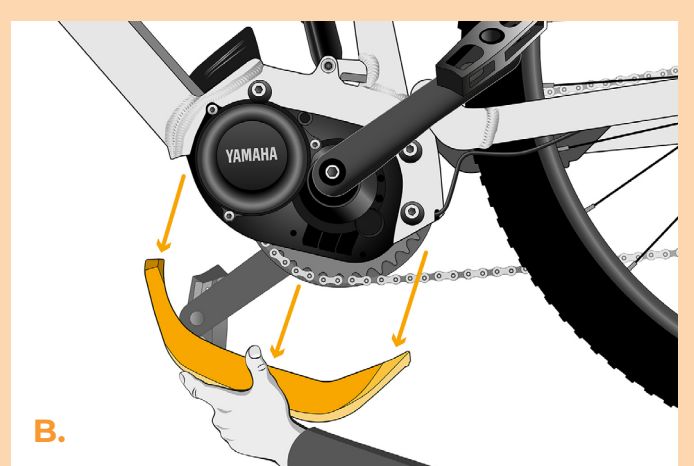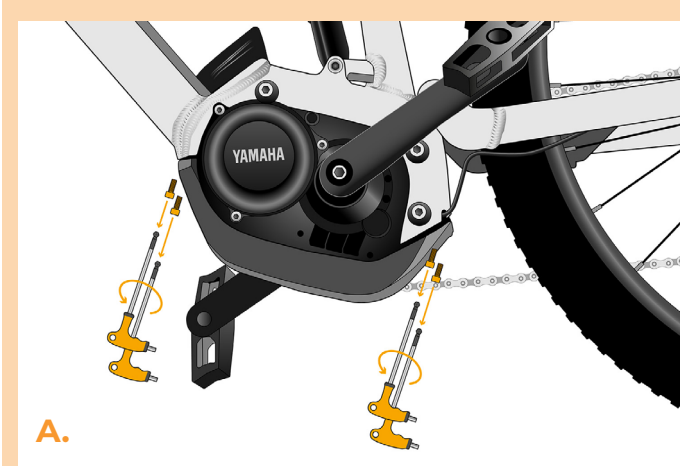


## STEP 3: Lowering the Motor

- A.** Slightly loosen the bottom screw holding the motor. Unscrew the upper two screws with the hex key H6 and pull them out.
- B.** Carefully tilt the motor out of the e-bike frame to access the motor connectors and wiring.

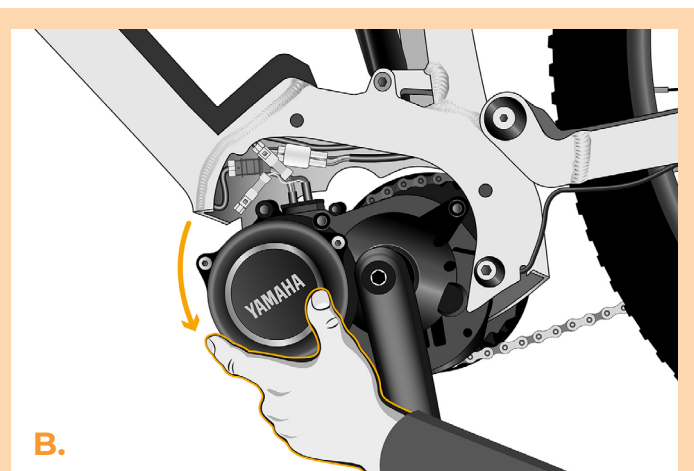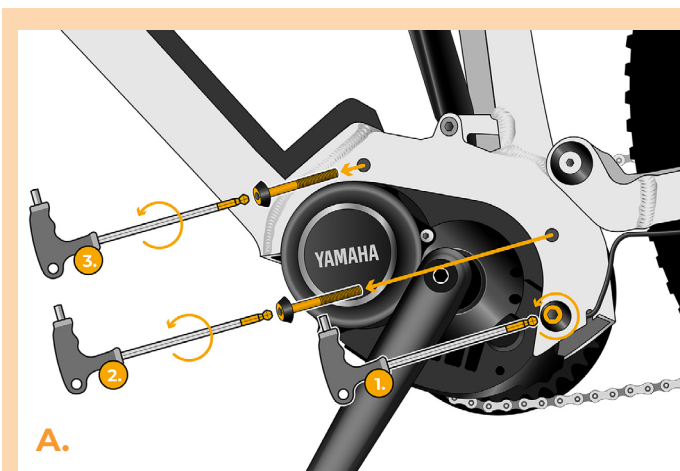


## STEP 4: Disconnecting the connectos from the motor

- A.** Disconnect the speed sensor connector with the slotted screwdriver.
- B.** Disconnect the display connector in the same manner.

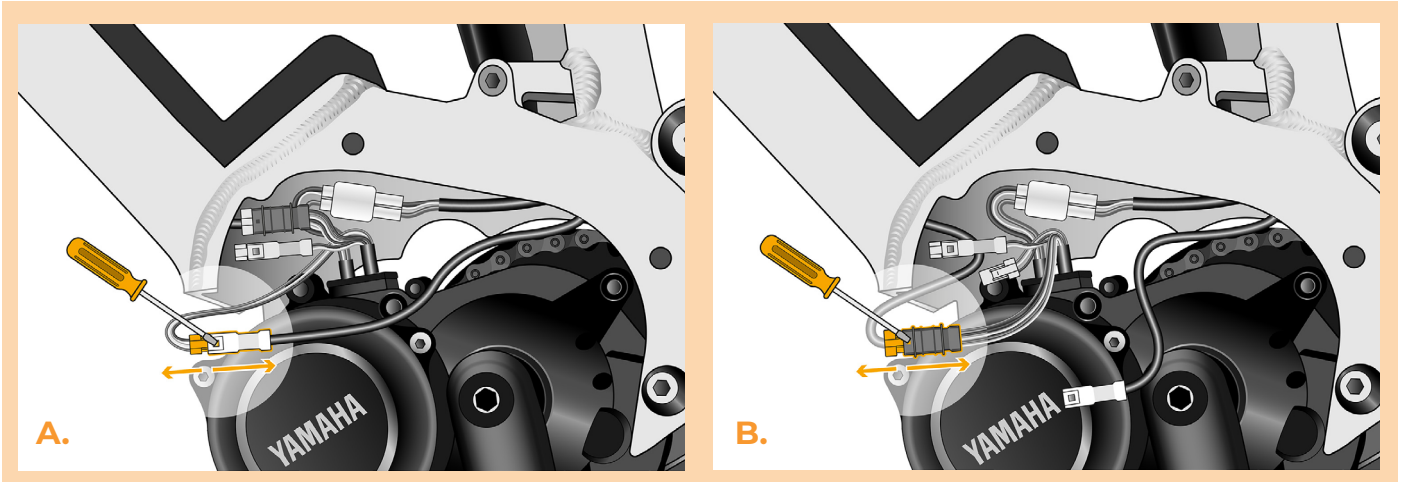





## STEP 5: SpeedBox tuning installation

- A.** Plug SpeedBox into the disconnected connectors (step 4).
- B.** Make sure that the locks on the connectors are seated properly.
- C.** Before assembling the motor, check the correct wiring as shown in the figure.

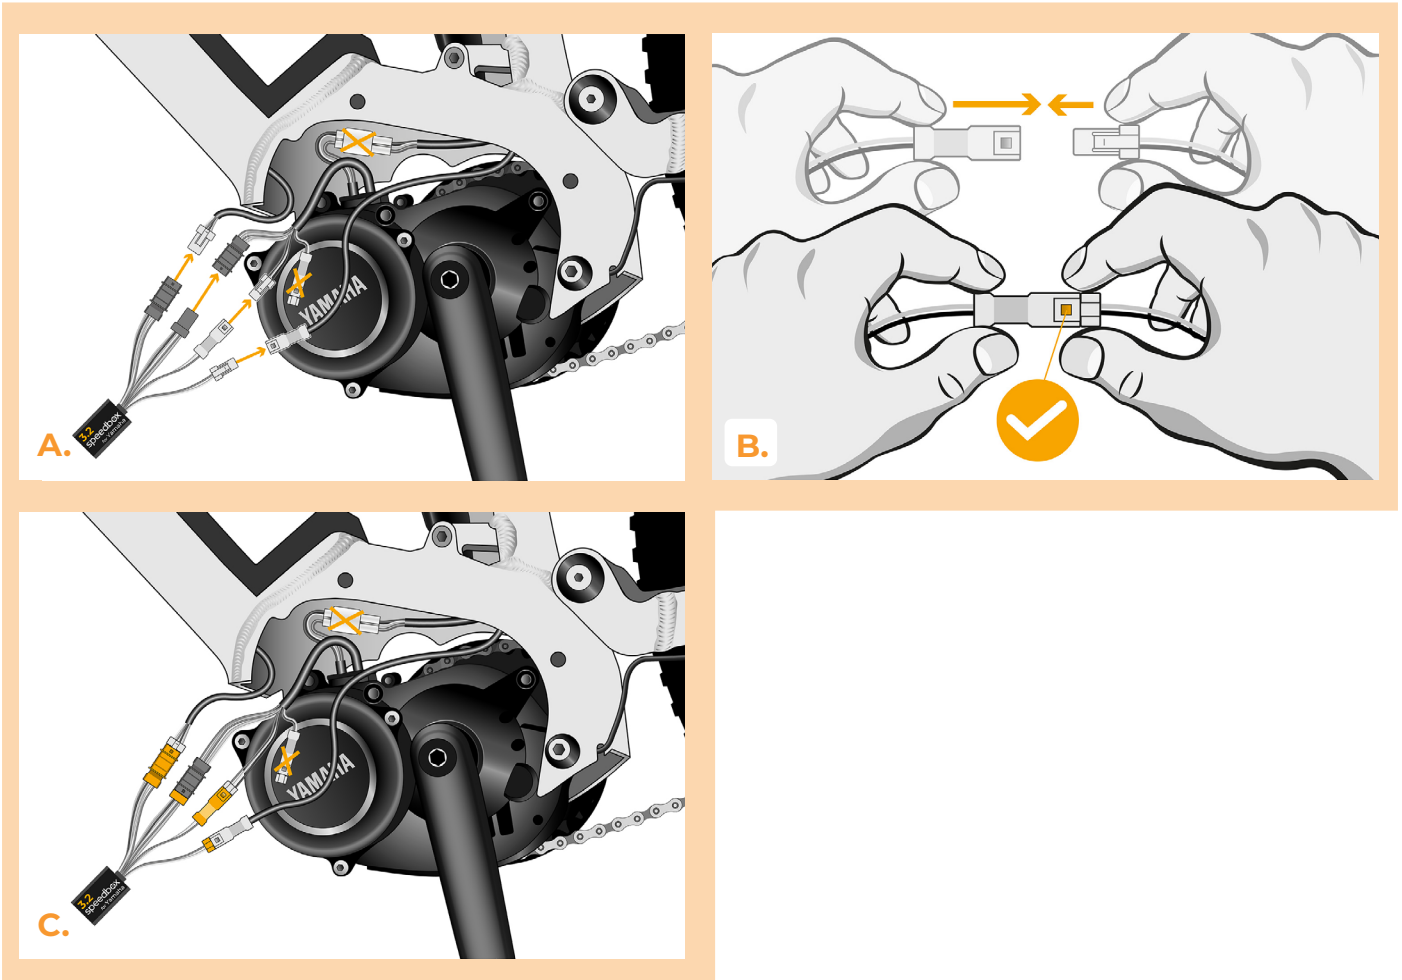


## STEP 6: Motor cover assembly

- A.** Place the connectors and wiring leading from the motor back into the free space in the e-bike frame. SpeedBox tuning chip should be out of the frame so that the metal frame of the e-bike does not block the Bluetooth signal.
- B.** Return the motor to its original position and be careful not to accidentally damage the cables.
- C.** Screw in the screws holding the motor in the frame and tighten well.
- D.** Place and screw the plastic engine cover back in place.

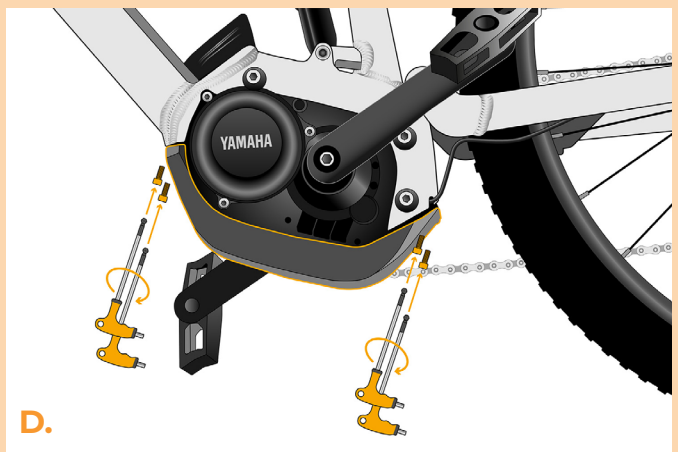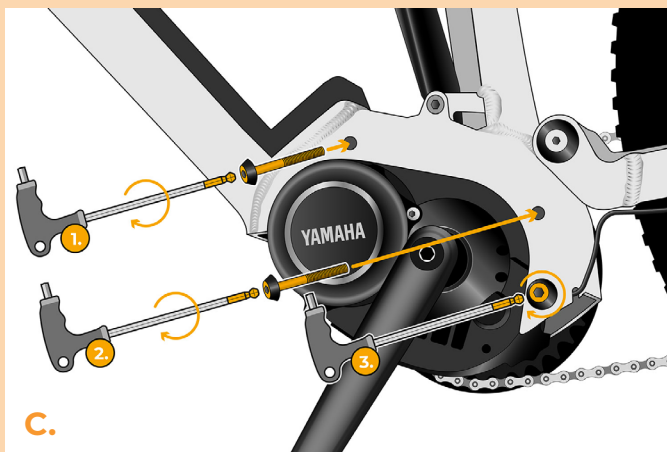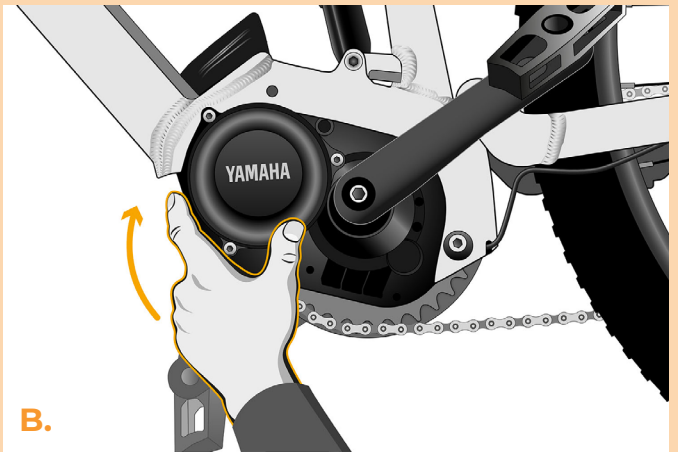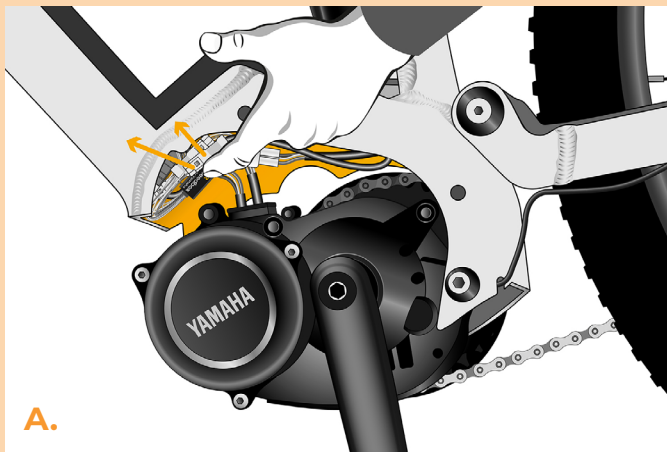


## STEP 7: Tuning function check


- A.** Place the battery back into the e-bike.
- B.** Turn the e-bike on.
- C.** You will activate/deactivate SpeedBox by pressing the LIGHT button shortly or by switching between two assistance modes twice (↑ ↓ ↑ ↓). The value of 99 or 25 will be shown indicating the maximum speed limit in km/h.
- D.** Spin the rear wheel and make sure the rear wheel speed is shown on the e-bike display.

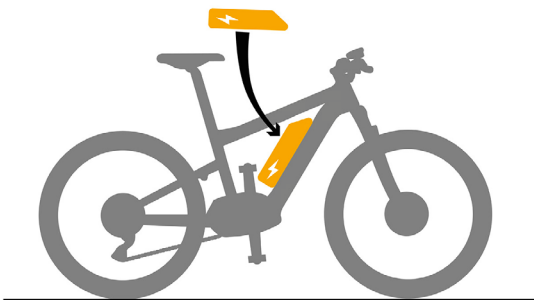


A.

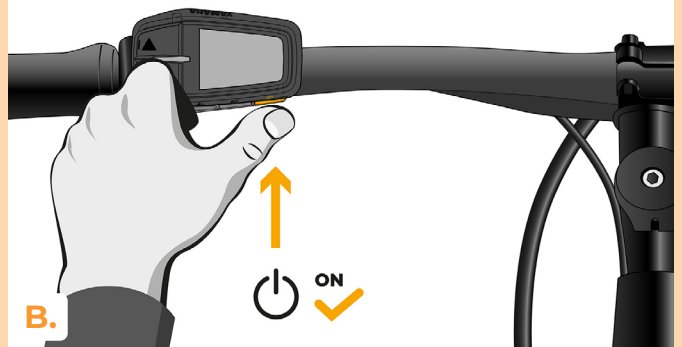

B.

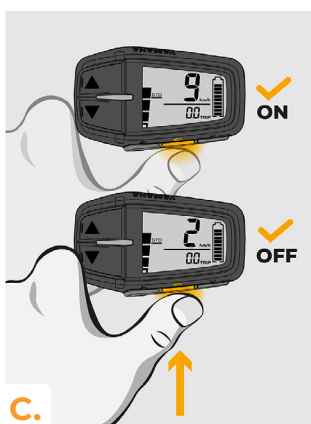

C.

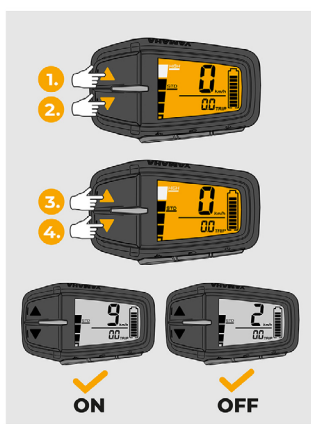


D.



## STEP 8: Setting the speed limit

- A.** Set HIGH mode. Switch between the assistance modes briefly in the following order HIGH > STD > ECO > ECO+ > ECO > STD > HIGH, i.e. go three levels down and three levels up ↓ ↓ ↓ ↑ ↑ ↑. The current speed limit will be displayed.
- B.** Set the maximum speed limit by pressing the LIGHT button briefly or by turning the rear wheel 360°. With each push on the button or turning of the wheel, the limit will increase by 5 km/h.

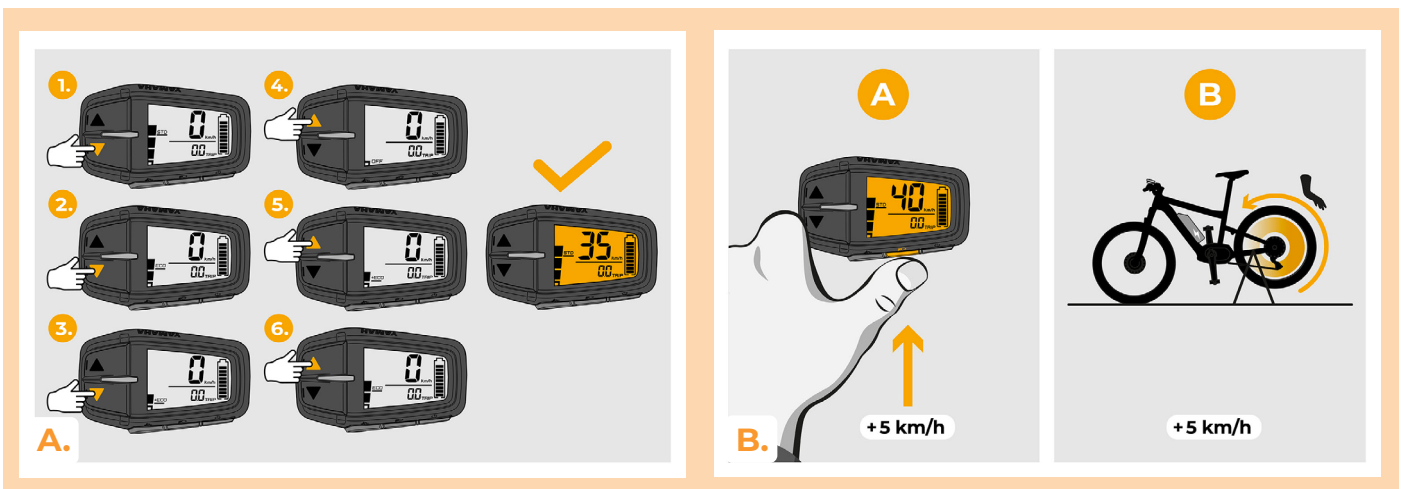

[www.speedbox-tuning.com](http://www.speedbox-tuning.com)

Ebike Electronic s.r.o.

Rybna 716/24 | 110 00 Praha 1 | Czech Republic | ID: 05553555 | VAT: CZ05553555

